


# GPS Clock



GDT-57

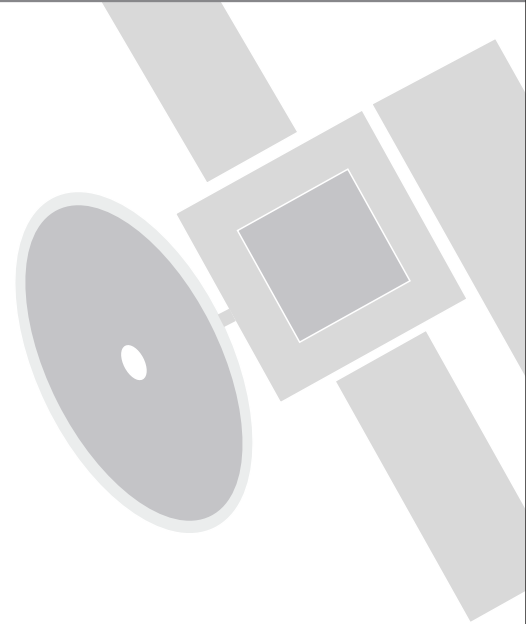

GDT-57 SS



## Right Time, Every Time



## Technical Specification


Model	Display height (mm)	Dimension (L x H x D) mm	Remarks
GDT-57	57	290 x 93 x 36	HIPS (Plastic), White
GDT-57SS		307 x 117 x 37	SS-304
GDT-57FLP		371 x 220 x 86	Flame proof enclosure with SS-304 cover
GDT-57-6		421 x 117 x 31	SS-304, HH:MM:SS
GDT-100SS	100	500 x 180 x 39	SS-304
GDT-100FLP		595 x 292 x 101	Flame proof enclosure with SS-304 cover
GDT-100-6		614 x 180 x 39	SS-304, HH:MM:SS

### GDT-Master



- GPS receiver module
- 866 MHz Wireless RF Transmitter
- $\pm 1$  sec accuracy
- RF Coverage 400M (Line of Sight) (depends on site conditions)
- Optional Time zone display

## Working principle of GPS Clock

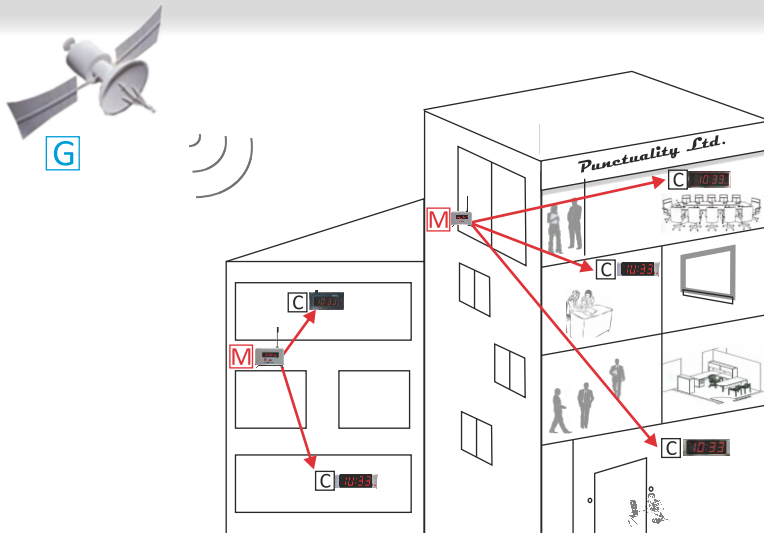

1. GPS Satellites **G** transmit accurate atomic time to all the Masters **M** in the facility
2. Masters **M** re-transmits this time at regular intervals to all the clocks **C** through wireless RF signals
3. Clocks **C** display uniform accurate atomic time all the time

Form no. CAT-GDT-Series-037 R10

### Essae-Teraoka Pvt. Ltd.

410, 100ft Road, 4th Block,  
Koramangala, Bengaluru-560 034

info@essae.com

<http://www.essae.com>

+91 80 3021 3021

+91 80 3021 3001

1-800-425-3111

0-78488 12346

**Essae**<sup>®</sup>  
...for Excellence

Your Essae representative

▲ Factories in Bengaluru and Goa ▲ 47 Branch Offices ▲ 250+ Service engineers ▲ 350+ Resellers/Partners

Note: Specifications are subject to change without notice. Other names and logos used are property of respective brands.