

MA-825

Milk Analyser

Essae[®]
...for Excellence



Success Loves Speed


Industrial Design

in Germany




Model		MA-825	MA-825SS
Technology		Ultrasonic Sensor	
Measuring Time		23 sec @ 30° C Milk temperature	
Milk Acidity		<25° T (degree Thorn)	
Milk Temperature		10 ~ 40° C	
Milk Sample Volume		25 ml	
Display		2 x 20 Character LCD Display with Green Backlight	
Keyboard		4 Keys	
Power	AC Power	160 V ~ 270 V / 50 Hz AC 1.6 A max	
	DC Voltage	12 V ~ 14.2 V DC	
	Consumption	40 W max	
	DC Cable	DIN connector with cable length of 1.8 meter	
Environment	Ambient Air Temperature	10 ~ 40° C	
	Relative Humidity	30 ~ 80 %	
Interface		1 x RS-232 Serial with Cable	
Cleaning		Manual & Auto	
Physical Dimensions		138 (W) x 265 (D) x 276 (H) mm	138 (W) x 251 (D) x 275 (H) mm
Weight		2.9 kg	3.65 kg
Enclosure		ABS	SS

Parameter	Range	Resolution	Accuracy
Fat	0.5 ~ 15 %	0.1 %	+/- 0.1 %
SNF	3 ~ 15 %	0.1 %	+/- 0.2 %
Added Water	0 ~ 100 %	1 %	+/- 3 %
CLR	20 ~ 40	0.5	+/- 1
Lactose	1 ~ 8 %	0.1 %	+/- 0.2 %
Protein	1 ~ 6 %	0.1 %	+/- 0.2 %
Salt	0.2 ~ 1.5 %	0.1 %	+/- 0.2 %



Manual Cleaning

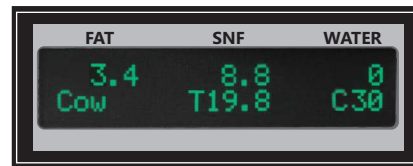

Bright GREEN LCD Display

Salient Value

- Dual Ultrasonic Sensor for faster measurement and high precision for high fat milk
- Industrial Design in Germany for elegant styling & aesthetics
- User friendly manual cleaning for superior performance
- Selectable DATA format for easy interface with any DPU & Dairy Software
- Memory : Cleaning, Correction & Calibration records with time stamp

Essae-Teraoka Pvt. Ltd.

410, 100ft Road, 4th Block,
Koramangala, Bengaluru-560 034

info@essae.co

http://www.essae.com

+91 80 2511 3021

1-800-425-3111

0-78488 12346

Essae[®]
...for Excellence

Your Essae representative