


PG/FB Series

Precision Weighing Balance

Essae[®]
...for Excellence

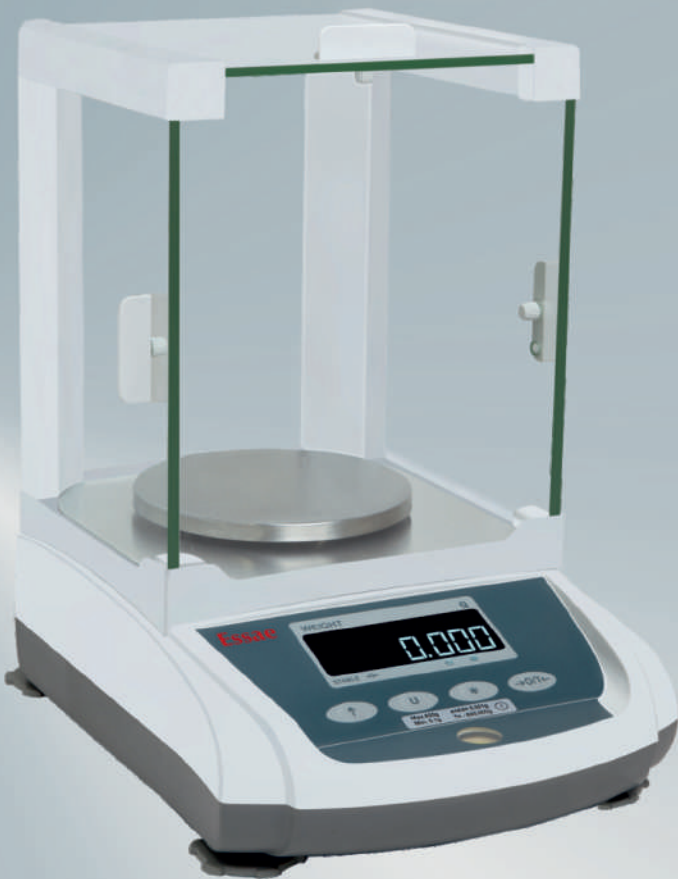

Engineered and Built for Precision



Technical Specification

Model number	FB-200	FB-300	FB-600	PG-1000
Maximum weighing capacity	200 g	300 g	600 g	1000 g
Readability	0.001 g	0.001 g	0.005 g	0.01 g
Display resolution	2,00,000	3,00,000	1,20,000	1,00,000
Platter Size	Dia 110 mm	Dia 110 mm	Dia 110 mm	Dia 150 mm
Draft Shield	Included (Standard)	Included (Standard)	Included (Standard)	Optional accessory



Customer display



RS-232 interface for easy computer connectivity



AC / DC Adaptor

Model number	FB-600	FB-2000	FB-3000
Maximum weighing capacity	600 g	2000 g	3000 g
Readability	0.001 g	0.01 g	0.01 g
Display resolution	6,00,000	2,00,000	3,00,000
Platter size	Dia 110 mm	Dia 150 mm	Dia 150 mm
Draft shield	Included (Standard)	Optional accessory	Optional accessory

Technology	Electro Magnetic Force Restoration Technology (EMFRT)	Calibration method	Automatic software calibration (External weight)
Operating temperature	+10°C to +40°C	Tare range	Full capacity
Sensitivity drift (20°C to 40°C)	+/- 5 ppm/°C	Repeatability / Verification interval Linearity	+/- 1 d +/- 2 d
Display type	Green Vacuum Fluorescent Display (VFD)	Dimensions without draft shield (Width x Depth x Height)	190 mm x 275 mm x 85 mm (Table-top)
Display digits / Size	7 Digits / 13 mm	Approx. gross weight (balance only)	2 to 2.3 kg (Table-top)
Power supply - AC / DC adaptor	Input – 230 V AC, 50 Hz Output – 6.9 V DC @ 1.5 A Max Watt – 13 W	W&M classification	Class II (PG Series) Class I (FB Series)
Processor	Digital 8-bit micro-computer	Default weighing units	Grams



FB-200 / 300 / 600



PG-1000, FB-2000 / 3000

Essae-Teraoka Pvt. Ltd.

410, 100ft Road, 4th Block,
Koramangala, Bengaluru-560 034

info@essae.com

http://www.essae.com

+91 80 2511 3021

1-800-425-3111

0-78488 12346

Essae[®]
...for Excellence

Your Essae representative